




LIQUID SOLVENT BASED BITUMINOUS PRIMER
MADE FROM OXIDIZED BITUMEN DISTILLED FROM
THE FAMOUS "LIGHT ARABIAN CRUDE" MIXED
WITH SOLVENT AS PER ASTM D-41



PUBLICATION NO.: 901/E/R-2/SEP'05

DERMA PRIMER

DERMA PRIMER is a bituminous liquid that seals porous surfaces, such as Concrete and when used improves the adhesion of Bituminous materials that are to be applied to the substrate. We recommend use of **DERMA PRIMER** in all applications of DWI **DERMA BIT** range of torch applied and self adhesive membrane. **DERMA PRIMER** conforms to ASTM D-41.

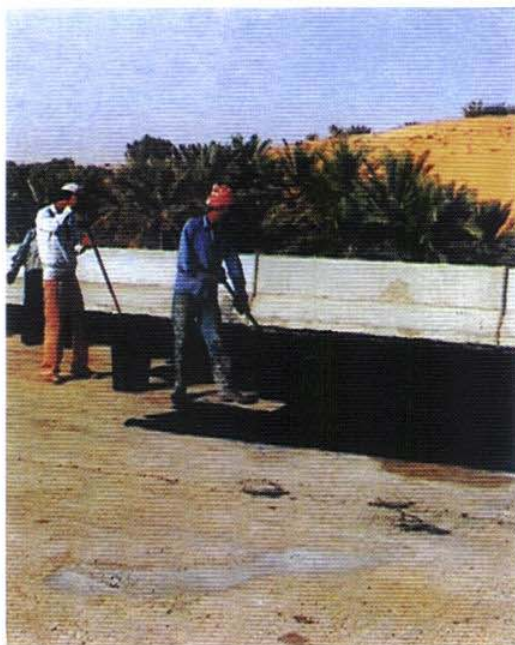

APPLICATIONS

DERMA PRIMER should be thoroughly stirred before use and applied to the substrate by means of Brush, Roller or Spray, at the rate of 300 gms/M² BRUSH/ROLLER APPLICATION and 200 gms/M² SPRAY APPLICATION.

The area to be treated should be free from grease, oil, dust etc. Concrete should be cured and at least eight days old. After drying any localized discolouration of the surface should be retreated and allowed to cure.

Only prime areas that are to be covered in one day. Do not leave the Primer exposed for more than 24 hrs. If this should be the case, apply a further coat and allow to cure as above.

Tools may be cleaned with White Spirit or Paraffin.

DRYING TIME: 2 hours \pm 1 hour depends on local weather conditions at the time of application.

PACKAGING:

18 kg PAILS and 180 kg DRUMS.

TECHNICAL DATA

DERMABIT PRODUCTS ARE TESTED AT RANDOM INTERVALS BY INDEPENDENT LABORATORIES TO INTERNATIONAL STANDARDS AND THE RESULTS OF THESE TESTS ARE AVAILABLE ON REQUEST. IN ADDITION, EACH BATCH MANUFACTURED IS SUBJECT TO STRICT QUALITY CONTROL PROCEDURES TO ENSURE IT MEETS APPROPRIATE AND APPLICABLE STANDARDS AND/OR NORMS.

DERMAPRIMER

Typical properties of **DERMAPRIMER** are as follows:

Colour When Cured	BLACK
Specific Gravity	0.8 - 0.9
Service Temperature	+5° to +50°C
Shelf Life	2 YEARS
Coverage	300g/M2 Brush/Roller 200g/M2 Sprayed
Toxicity	UN N° 1992 (Flammable. Liquid, Toxic N.O.S.)
Flashpoint	65°C - Class 3 (Primary Risk)

GENERAL NOTE ON HANDLING OF DERMABIT PRODUCTS:

Health & safety:

As with all chemical products, care should be taken during use and storage to avoid contact with foodstuffs, skin, eyes and mouth. If accidentally ingested, DO NOT induce vomiting. Give copious amounts of water to drink. Keep away from children and animals, Reseal containers after use.

Solvent Based Products:

Use in well ventilated areas, avoid inhaling, do not smoke or allow sparks or naked light where stored or in use.

Spillage:

Chemical compounds may cause damage. Clean spillage immediately.

Storage:

Reseal containers after use.

Liquid products:

Reseal containers after use.

Storage Life:

Varies with product and climatic conditions but usually not exceeding twenty four months.

Precise details are available from our JUBAIL PLANT AND HEAD OFFICE.

The above data are average figures obtained from the tests of various samples and are subject to the tolerances defined in the specified test methods.

DWI, DERMABIT WATERPROOFING INDUSTRIES COMPANY LTD.

Head Office	P. O. Box 10308 - Jubail Industrial City 31961 Saudi Arabia Telephone : 00966 3 3410464 Telefax : 00966 3 341 0481 E-mail: dermabit@dermabit.com.sa Website : dermabit.net
Riyadh Branch	Telephone : 00966 1 4645988 / 4657761 Telefax : 00966 1 4634100 E-mail: dwi_riyadh@dermabit.net
Jeddah Branch	Telephone : 00966 2 6973309 - Telefax : 00966 2 6976374 E-mail: dwi_jeddah@dermabit.net
Al-Khobar Branch	Telephone : 00966 3 8823986 - Fax : 00966 3 8878025 E-mail: dwi_khobar@dermabit.net

Submitted by :